



With flush at the bumper



With flush ring

NEW !

**AUTOMATIC
NOZZLE**


FlowMatic Compact

EN15182-2 certified automatic controlled pressure variable flow nozzle

- PN40 = for high pressure application
- Body in Hard anodized Aluminum
- 6 positions (5 open + shut off) controlled by a wide flow handle for instantaneous reaction
- Adjustment of the full jet to the optimal spray angle in a quarter turn
- Stainless steel slide valve for keeping perfect stream quality
- Powerful full cone spray for smothering flames.
- Pulsing mode with opening at 2 bar
- Unbreakable teeth : **No maintenance**
- **Polyurethane Bumper**: resistant to high temperatures, hydrocarbons and aggressive chemicals
- Strainer to prevent large debris ingress (1.5 and 2" only).



Leader Nozzles are available in 3 different sizes:



As part of our policy of constant research to improve our products, we reserve the right to modify our products characteristics at any time without notice

Characteristics

Model	Ref. with flush at bumper	Ref. with flush ring	Weight (less 110g for models with flush at bumper)	Flow rate	Pressure	Inlet	Special features
FlowMatic 150	NAA-010-LI	NAA-007-LI	1" & 1.5": 1.75kg / 3.85 lbs	0-150 lpm	6 bar	1" BSP F	
FlowMatic 250	NAA-008-LI	NAA-001-LI		0-250 lpm			
FlowMatic 400	NAA-011-MI	NAA-002-MI	2" BSP M: 1.85kg / 4.1 lbs	0-400 lpm		1.5" BSP F	
FlowMatic 400	NAA-012-EI	NAA-003-EI				2" BSP M	
FlowMatic 400 AA	NAA-013-EI	NAA-004-EI	1.95 kg / 4.3 lbs				AA trigger
FlowMatic 125G		NAA-005-TI	1.75kg / 3.85 lbs	0 – 125 GPM	100 PSI	1.5" NPSH F	
FlowMatic 125G	NAA-016-RI	NAA-006-RI				1.5" NH F	

Dimensions (less 2cm /0.8" for model with flush at bumper)

For 1" F inlet versions:

L. 27 x l. 12 x h. 23cm / L. 10.6" x l. 4.7" x h. 9"



For 1.5" F inlet versions:

L. 29 x l. 12 x h. 23cm / L. 11.4" x l. 4.7" x h. 9"

For 2" M inlet version:

L. 31.5 x l. 12 x h. 23cm / L. 12.4" x l. 4.7" x h. 9"

Curve: Flow vs Pressure

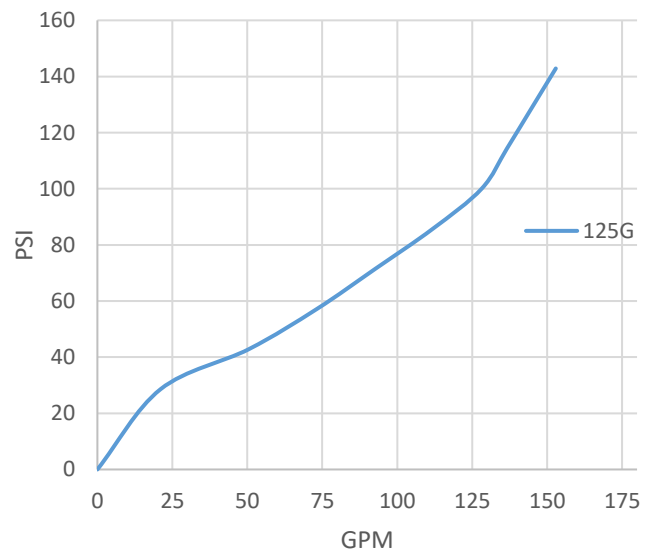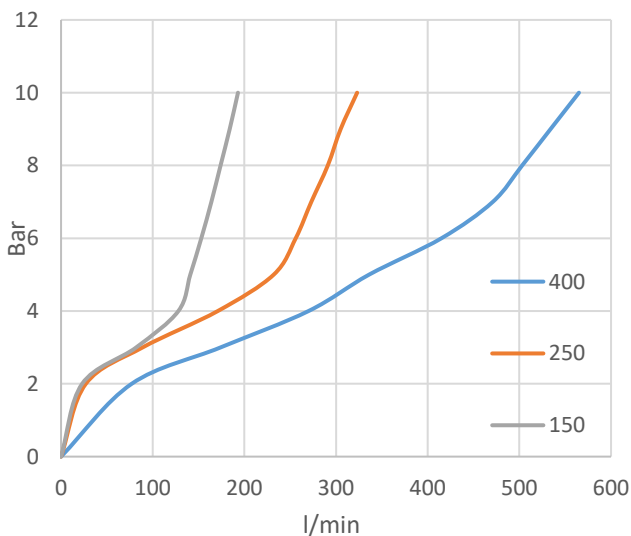

Options

All coupling types

Foam adapter

Coloured (red, blue, yellow, green, orange) flow control handle and pistol grip covers (Multimatic are delivered as standard with blue covers)



AA trigger version:

Flow handle lock, resettable in order to limit the maximum water flow (L=35cm with ring)



Reduced cost of ownership:

Very light maintenance requirement due to the nozzle design and materials used.

ZF.01.289.EN.2