



**NEW !**

**SELECTABLE FLOW  
NOZZLE**

# MultiFlow Compact

PN40 - EN15182-2 certified selectable flow nozzle

- Body in Hard anodized Aluminum
- 6 positions (5 open + shut off) controlled by a wide flow handle for instantaneous reaction
- Adjustment of the full jet to the optimal spray angle in a quarter turn
- Stainless steel slide valve for keeping a perfect stream quality
- Powerful full cone spray for smothering flames.
- Unbreakable teeth : No maintenance
- **Polyurethane Bumper**: resistant to high temperatures, hydrocarbons and aggressive chemicals
- Strainer to prevent large debris ingress.



**Leader Nozzles are  
available in 3  
different sizes:**

**Compact**



**Regular**



**Large**



As part of our policy of constant research to improve our products, we reserve the right to modify our products' characteristics at any time without notice

## Characteristics



Models	Réf.	Weights	Flow rates	Pressures	Inlets
<b>MultiFlow 150</b>	NMA-002-LI	1" BSP F: 1.75kg / 3.85 lbs	20 - 40 - 100 – 150 l/min	6 bar	1" BSP F
<b>MultiFlow 250</b>	NMA-003-LI		40 - 100 - 150 – 235 l/min		
<b>MultiFlow 150</b>	NMA-001-EI	2" BSP M: 1.85kg / 4.1 lbs	20 - 40 - 100 – 150 l/min		
<b>MultiFlow 400</b>	NMA-004-EI		70 - 130 - 230 – 400 l/min		
<b>MultiFlow 40 G</b>	NMA-006-1I	1.75kg / 3.85 lbs	5 – 10 – 24 - 40 GPM	100 PSI	1" NH F
<b>MultiFlow 125G</b>	NMA-005-RI		30 – 60 – 95 - 125 GPM		1.5" NH F

## Dimensions

For 1" inlet versions: L. 29 x l. 12 x h. 23cm / L. 11.4" x l. 4.7" x h. 9"

For 2" inlet version: L. 31.5 x l. 12 x h. 23cm / L. 12.4" x l. 4.7" x h. 9"

## Curve: Flow vs Pressure

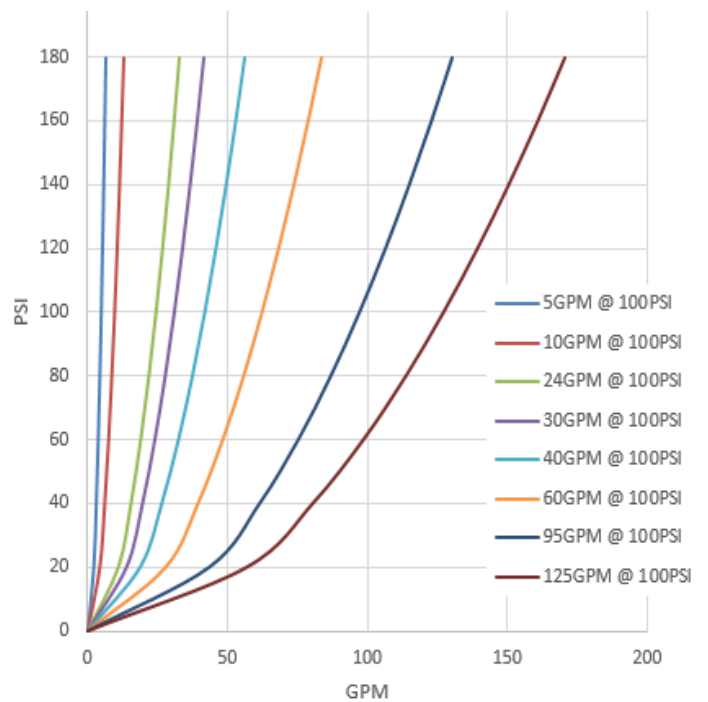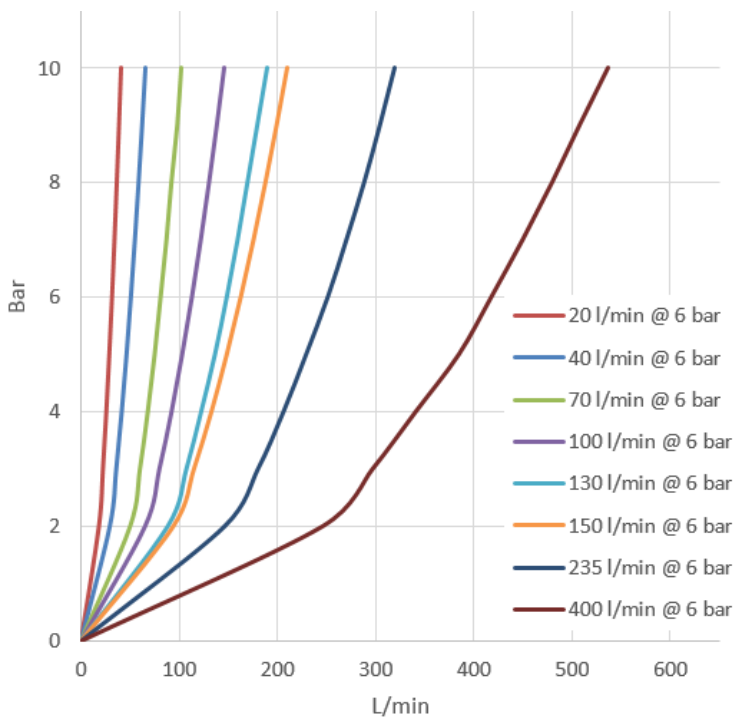

## Options

All coupling types

Foam adapter

Coloured (red, blue, yellow, green, orange) flow control handle and pistol grip covers (MultiFlow are delivered as standard with red covers)

## Reduced cost of ownership:

Very light maintenance requirement due to the nozzle design and materials used.



ZF.01.290.EN.2